

	ELBO CONTROLLI TECHNICAL INSTRUCTIONS	IST.N° 001 DATE 28/07/13 REV. 0 PAGE 1 /4
	Subject : Sethy SIX and Hathor SIX software upgrade	

INTRODUCTION

The following picture shows how to upgrade the Sethy SIX and Hathor SIX presetting machines software.

SOFTWARE DOWNLOAD

First of all, verify which is the Version installed on your machine.

When the software starts you see it on the screen. The version can be read also in the machine configuration page (see chapter 8.2 of the instruction manual).



To download the latest version, connect to the web site <http://www.elbocontrolli.it/>, then access to the "Support" section.

If the version on the web site is more updated, download the file

"elbo_upgrading_vxxx.tar.gz"

(vxxx shows the version e.g. v1.1c), click on "SOFTWARE VERSION x.xx" and save it on a USB key.


Attention: verify if there are notes concerning the compatibility of the software with previous versions

Attention: check that the USB dungle volume name does not contain spaces


	ELBO CONTROLLI TECHNICAL INSTRUCTIONS	IST.N° 001 DATE 28/07/13 REV. 0 PAGE 2 /4
	Subject : Sethy SIX and Hathor SIX software upgrade	

SOFTWARE UPGRADE

Turn the presetting machine on, then wait for the software to start.
 Insert the USB key in one of the ports available on the machine.

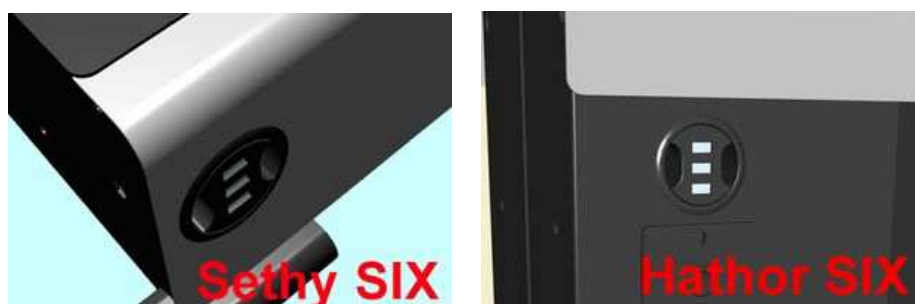


The system will automatically verify the presence of a new software and the following screen will appear.

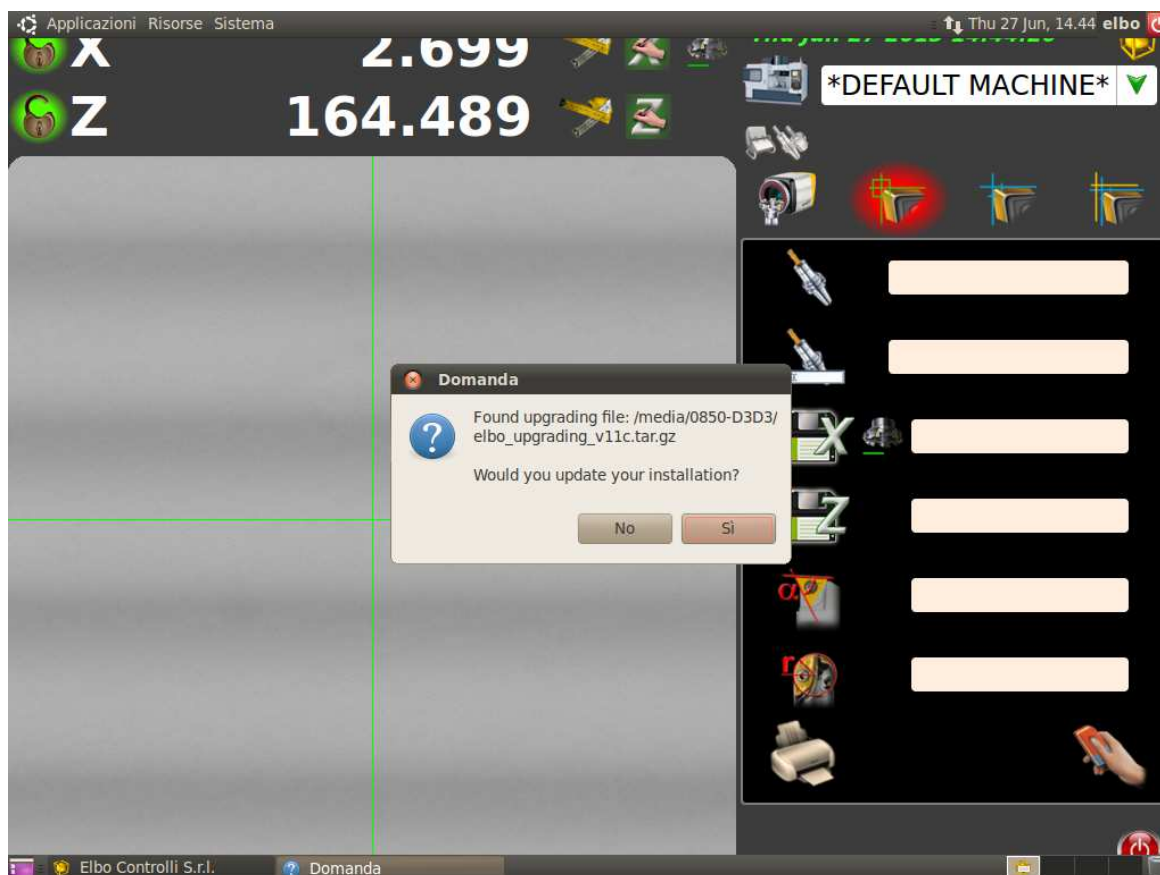

Press "Yes" to start the updating procedure.

	ELBO CONTROLLI TECHNICAL INSTRUCTIONS	IST.N° 001 DATE 28/07/13 REV. 0 PAGE 3 /4
	Subject : Sethy SIX and Hathor SIX software upgrade	

The existing software will be closed and the version on the USB key will be installed.
 A message on the screen will inform you that the upgrading process is over.

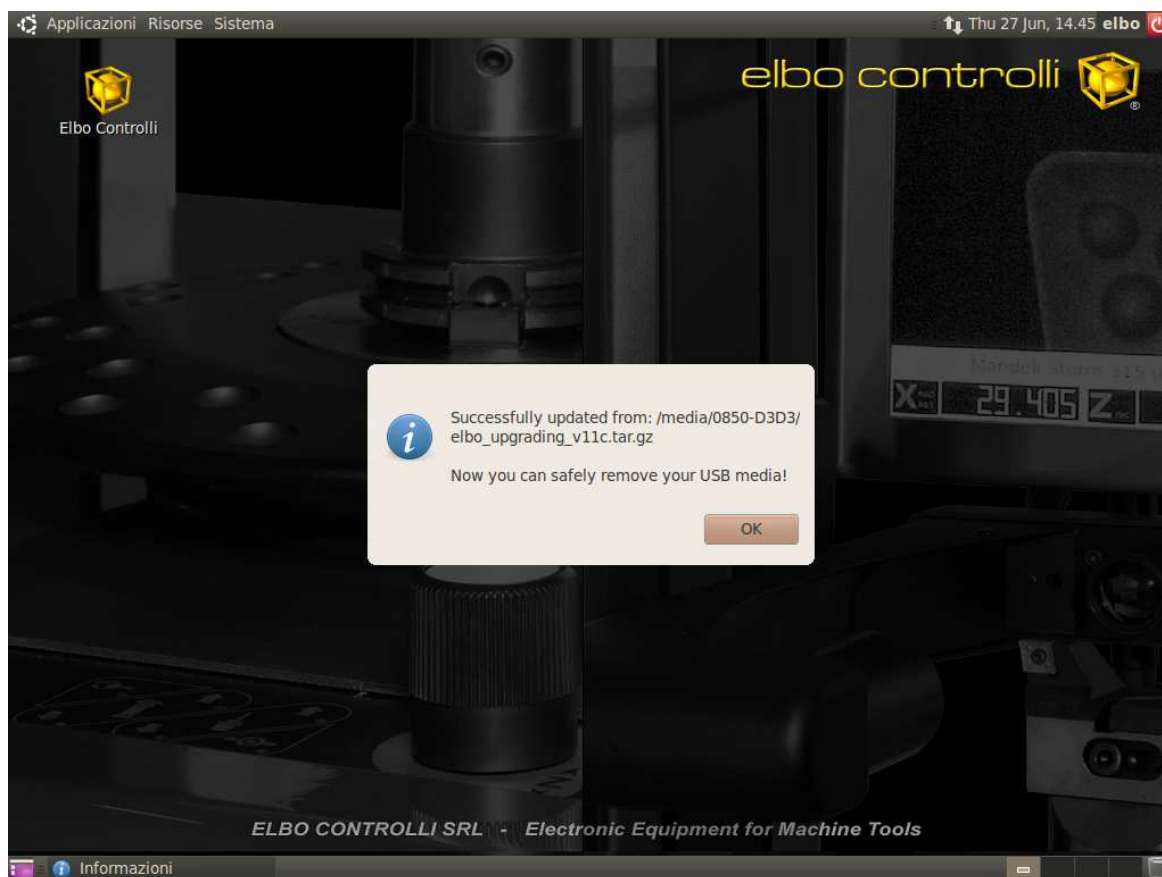

Press "OK", remove the key from the Usb port and launch the programme again, verifying that the version is the actually installed one.

At the end of the procedure the file on the USB key is automatically renamed as :

"elbo_upgrading_vxxx.tar.gz.done"


to avoid a new performance inserting the key again. If the installation fails and you need to use thus file again, restore the original name, removing the ".done" extension.

	ELBO CONTROLLI TECHNICAL INSTRUCTIONS	IST.N° 001 DATE 28/07/13 REV. 0 PAGE 4 /4
	Subject : Sethy SIX and Hathor SIX software upgrade	

OBSOLETE VERSION BACKUP AND RESTORE

During the upgrading procedure a new file : [\\elbo\Presetter\backup](#) will be created. The main programme, the database and the obsolete version configuration file will be saved in it.

A new file: "elbo_backup_XXXXXXXXXX.tar.gz" will be automatically generated, to be used to restore the obsolete version, in case of problems with the new installed one.

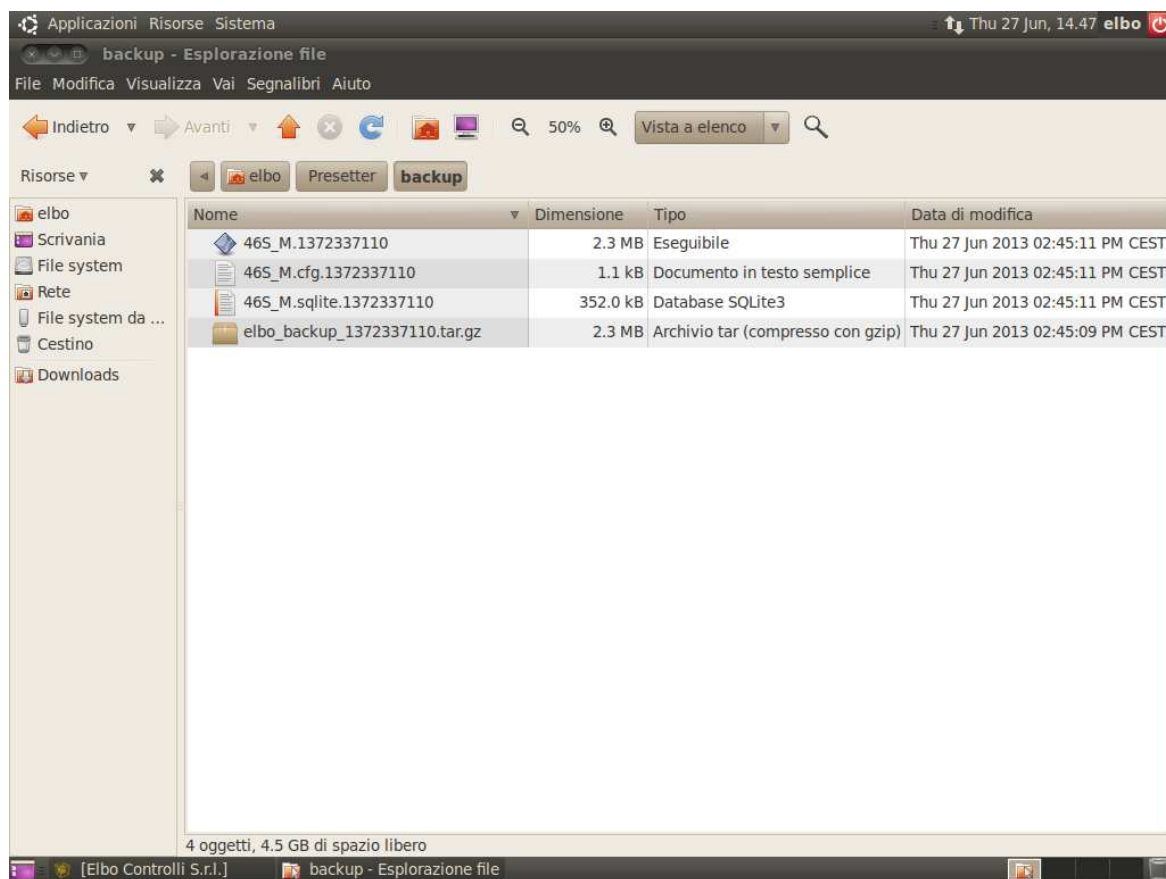

To carry out the downgrade, rename the file, replacing "backup" with "upgrading"

from "elbo_ **backup** _XXXXXXXXXX.tar.gz"

to "elbo_ **upgrading** _XXXXXXXXXX.tar.gz"

duplicate it on the USB key, then repeat the UPGRADE SOFTWARE procedure.